


THREE PHASE INDUCTION MOTOR

OUTLINE DIMENSIONS


OTHER SPECIAL FEATURES

1. CAST IRON FRAME AND END BRACKETS.
2. STAINLESS STEEL NAME PLATE WITH CONNECTION DIAGRAM.
3. STEEL FAN COVER AND TERMINAL BOX.

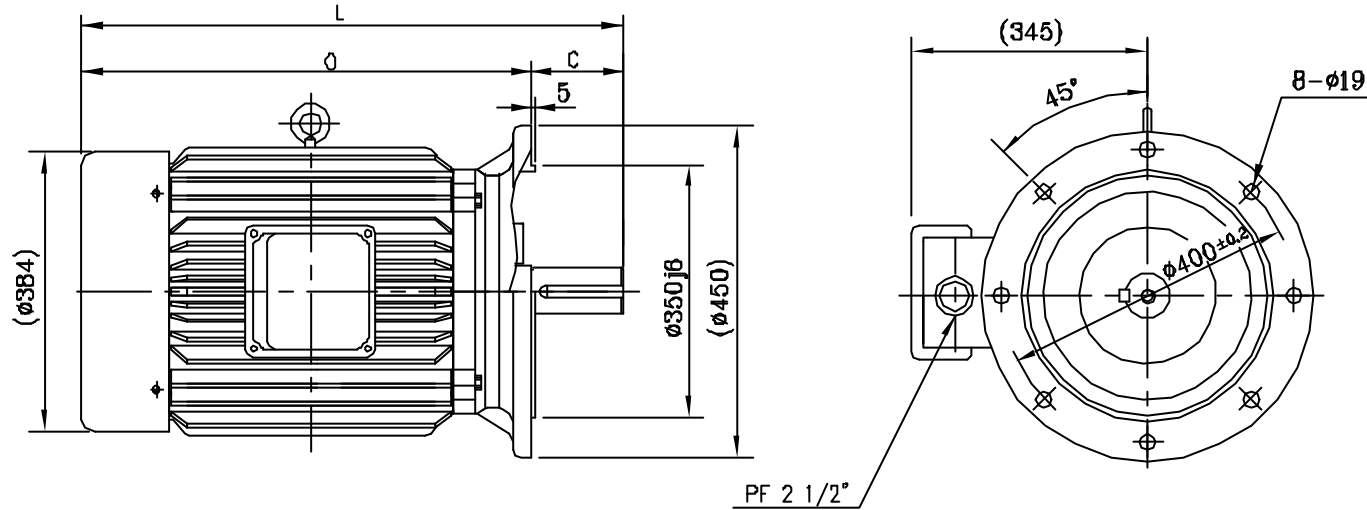

NOTE

1. 3 PHASE SQUIRREL CAGE INDUCTION MOTOR
2. TYPE : TOTALLY ENCLOSED FAN COOLED, FLANGE-MOUNTING FOOTLESS MOTOR.
3. ALL DIMENSIONS ARE IN MILLIMETERS.
4. THE TOLERANCE FOR THE KEY DIMENSIONS IS IN ACCORDANCE WITH KS B 1311-84

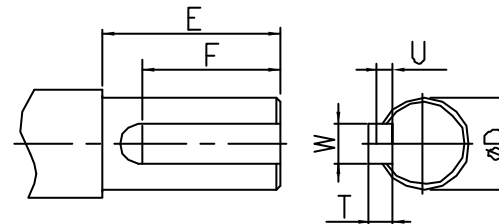

SHAFT EXTENSION

DRAWING NO.		
PREPARED	CHECKED	APPROVED
'00.07.28 K.I. HA	'00.07.28 H.T. KIM	'00.07.28 J.H. KIM

FRAME NO.	OUTPUT(KW)				DEGREES OF PROTECTION	RATING	L	O	C	E	F	W	T	U	φD
	2P	4P	6P	8P											
(FF400) 200L	17/45	37/45	30/37	18.5/22	IP44	CONT.	825(795)	685	140(110)	140(110)	110(98)	18(18)	11(10)	7	60(55)m6

**LG·OTIS**