


THREE PHASE INDUCTION MOTOR

TYPE ⇨ TOTALLY ENCLOSED AIR OVER

OTHER SPECIAL FEATURES

OUTLINE DIMENSIONS

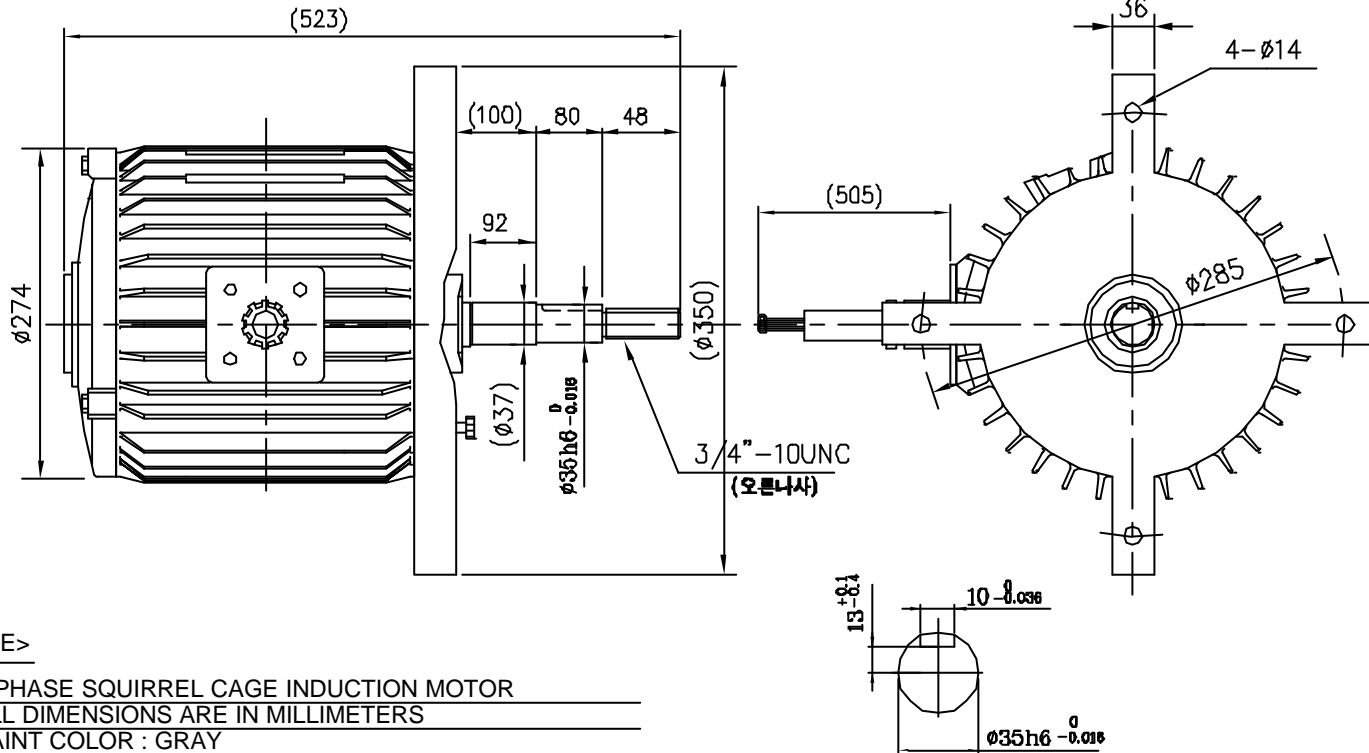

<참고>

1. SHAFT 끝단에 NUT 체결.
2. E/B(F) : OIL-SEAL 부착.
3. 모든 접부 역상가스켓 처리.
4. ()안의 치수는 참고치수임.

NOTE>

1. 3 PHASE SQUIRREL CAGE INDUCTION MOTOR
2. ALL DIMENSIONS ARE IN MILLIMETERS
3. PAINT COLOR : GRAY

SHAFT EXTENSION

GENERAL SPECIFICATIONS

NO.	FRAME NO.	KW	POLE	VOLTS	HZ	INS CLASS	SERVICE FACTOR	RATING	BEARINGS		APPROX WEIGHT	PROTECTION	MODEL NAME	
									DRIVE	OPP.DRAVE				
A	132S	3	8	220/380	60	F	1.0	CONT.	6208DD	6206ZZ	72KG	IP54		
B		3	8	440	60	F	1.0	CONT.	6208DD	6206ZZ	72KG	IP54		
C														
D														
E														

DRAWING NO.		PREPARED	CHECKED	APPROVED
		2000.07.25	2000.07.25	2000.07.25
		D.H.KAM	H.J. KIM	J.H. KIM

LG-OTIS