THREE PHASE INDUCTION MOTOR

TYPE ⇨TOTALLY ENCLOSED FAN COOLED

OTHER SPECIAL FEATURES

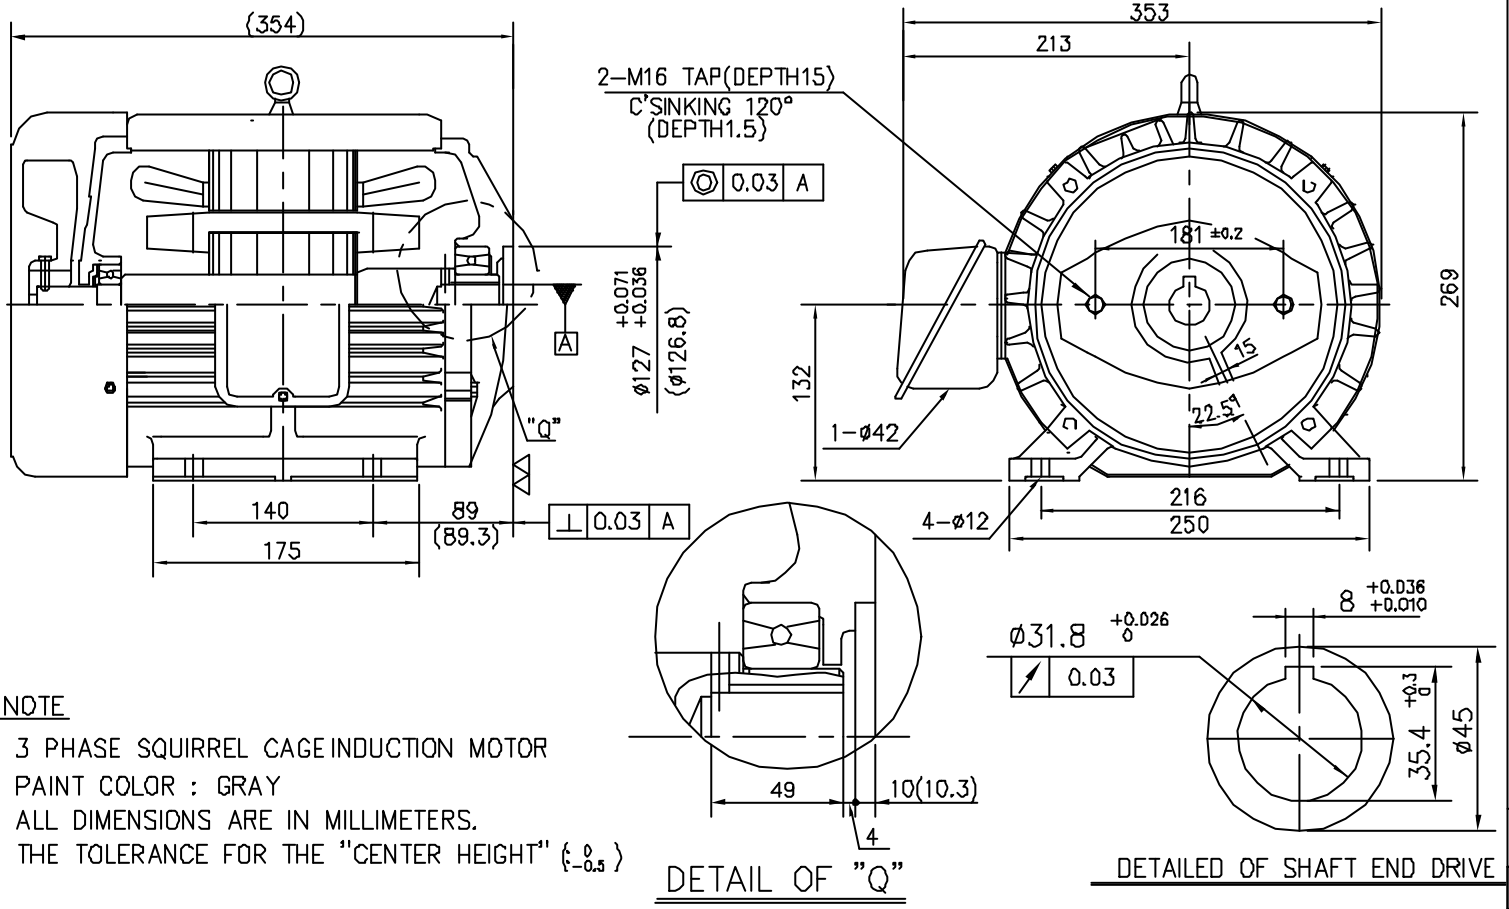

DETAIL OF "Q"

DETAILED OF SHAFT END DRIVE

NOTE

1. 3 PHASE SQUIRREL CAGE INDUCTION MOTOR
2. PAINT COLOR : GRAY
3. ALL DIMENSIONS ARE IN MILLIMETERS.
4. THE TOLERANCE FOR THE "CENTER HEIGHT" ($^{0}_{-0.5}$)

<참 고>

1. SHAFT 끝단 흔들림은 0.05이하일 것.
2. ( )안의 치수는 후가공전 치수임.

NO	FRAME NO.	KW	POLE	VOLTS	HZ	INS CLASS	SERVICE FACTOR	RATING	BEARINGS		APPROX WEIGHT	PROTECTION	MODEL NAME
									DRIVE	OPP.DRAVE			
A	132S	5.5	4	220/380	60	B	1.0	CONT.	6209ZZ	6206ZZ	66KG	IP44	108HK1DUT
B													
C													
D													

DRAWING NO.		
PREPEARED	CHECKED	APPROVED
2000.08.10 D.H.KAM	2000.08.10 H.J. KIM	2000.08.10 J.H. KIM

LG·OTIS