# THREE PHASE INDUCTION MOTOR

TYPE ⇨TOTALLY ENCLOSED FAN COOLED

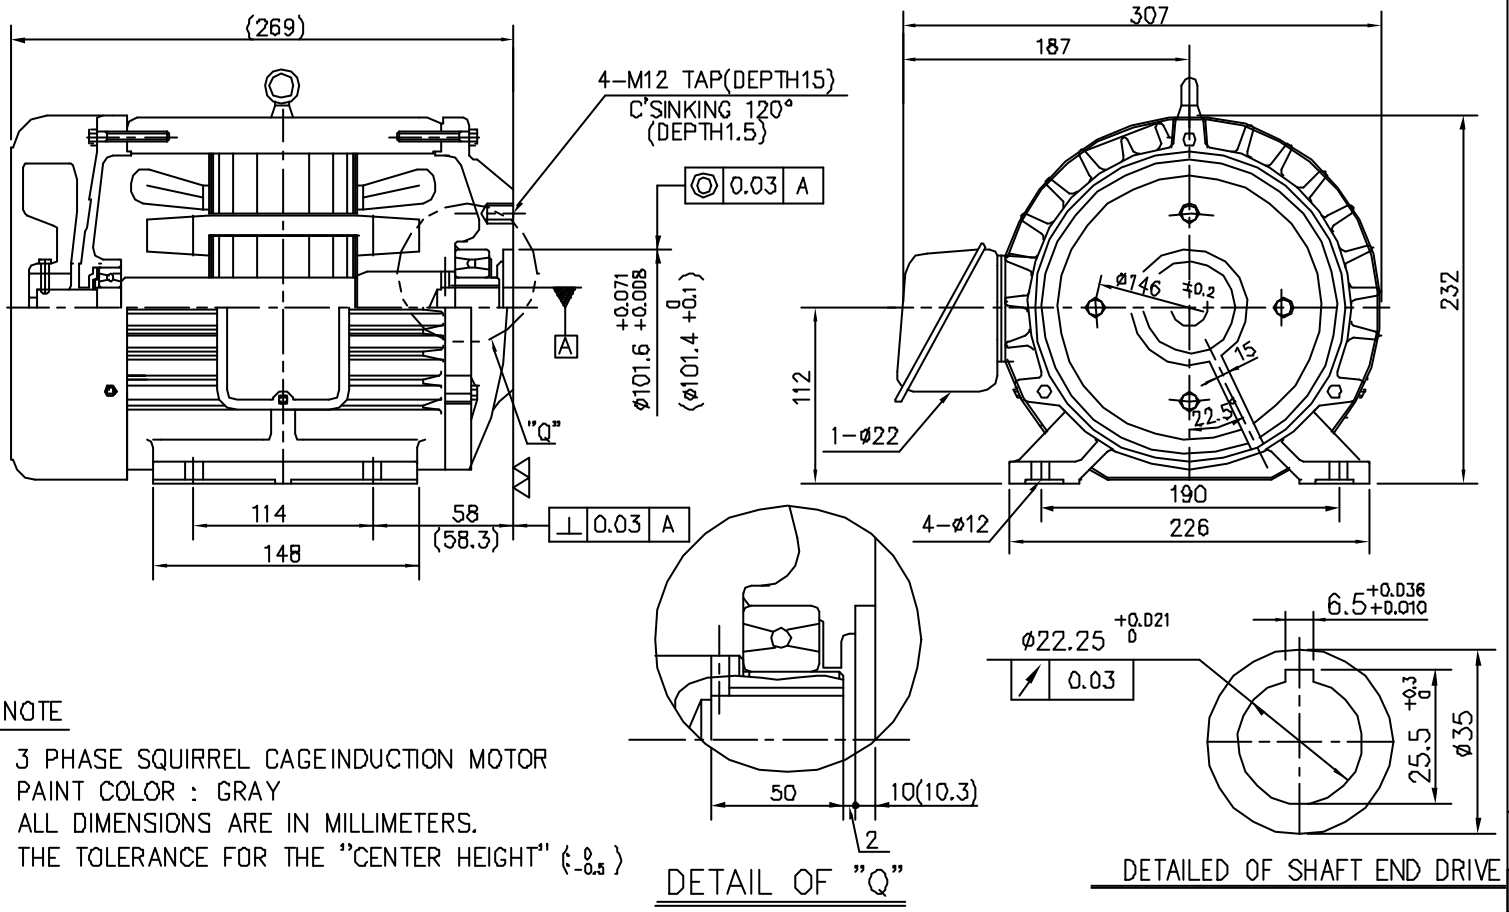


DETAIL OF "Q"

DETAILED OF SHAFT END DRIVE

NOTE

1. 3 PHASE SQUIRREL CAGEINDUCTION MOTOR
2. PAINT COLOR : GRAY
3. ALL DIMENSIONS ARE IN MILLIMETERS.
4. THE TOLERANCE FOR THE "CENTER HEIGHT" ($^{0}_{-0.5}$)

| NO | FRAME NO. | KW | POLE | VOLTS | HZ | INS CLASS | SERVICE FACTOR | RATING | BEARINGS | | APPROX WEIGHT | PROTECTION | MODEL NAME |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | DRIVE | OPP.DRAVE | | | |
| A | 112S | 2.2 | 4 | 220/380 | 60 | B | 1.0 | CONT. | 6207ZZ | 6205ZZ | 32KG | IP44 | 103HK1DUT |
| B | | | | | | | | | | | | | |
| C | | | | | | | | | | | | | |
| D | | | | | | | | | | | | | |

OTHER SPECIAL FEATURES

<참고>

1. MOTOR의 진동은 V30이하
2. ( )의 치수는 후가 공전 치수임

| DRAWING NO. | | |
|---|---|---|
| PREPEARED | CHECKED | APPROVED |
| 2000.08.16 D.H.KAM | 2000.08.16 H.J. KIM | 2000.08.16 H.J. KIM |

LG·OTIS