THREE PHASE INDUCTION MOTOR

TYPE ⇨TOTALLY ENCLOSED FAN COOLED

OTHER SPECIAL FEATURES

<참고>
1. MOTOR의 진동은 V30이하
2. ( )의 치수는 후가 공전 치수임

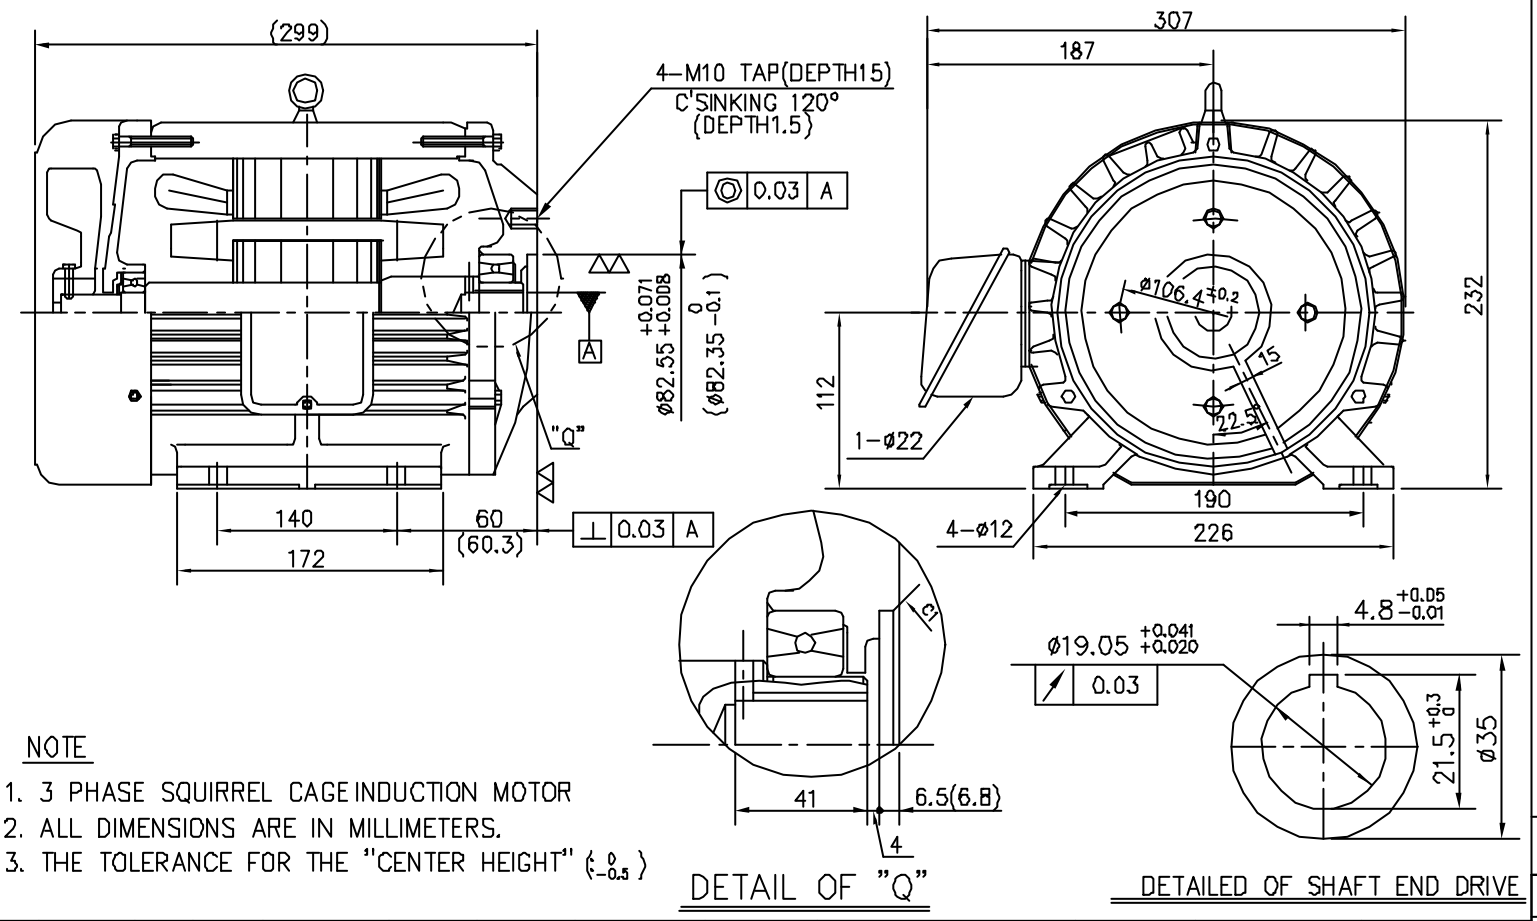

NOTE

1. 3 PHASE SQUIRREL CAGE INDUCTION MOTOR
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. THE TOLERANCE FOR THE "CENTER HEIGHT" ($^{0}_{-0.5}$)

DETAIL OF "Q"

DETAILED OF SHAFT END DRIVE

NO	FRAME NO.	KW	POLE	VOLTS	HZ	INS CLASS	SERVICE FACTOR	RATING	BEARINGS		APPROX WEIGHT	PROTECTION	MODEL NAME
									DRIVE	OPP.DRAVE			
A	112M	3.7	4	220/380	60	B	1.0	CONT.	6207ZZ	6205ZZ	43KG	IP44	105HK1DUS
B													
C													
D													

DRAWING NO.		
PREPEARED	CHECKED	APPROVED
2000.08.16 D.H.KAM	2000.08.16 H.J. KIM	2000.08.16 H.J. KIM

LG·OTIS